


SCF 不生銹軸心

Anticorrosive Shaft

材 質：軸承鋼(SUJ2)
 處理方式：高週波熱處理，研磨及表面鍍硬鉻
 硬 度：HRC 62±2

Material : SUJ2(high carbon chromium steel)
 Treatment : Heat treatment ground, chromium plated and polished
 Hardness : HRC 62±2

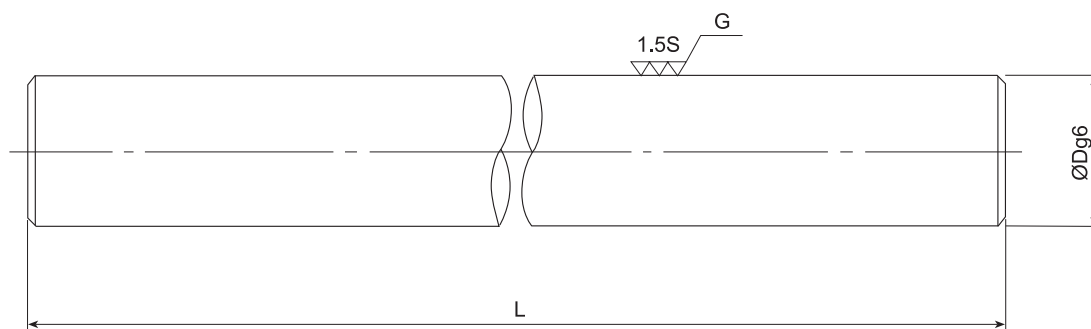

外徑 Diameter D mm	型號 Model No. SCF	外徑公差 Diameter tolerance μm g6	最大製作長度 Max Length L mm	有效硬化層深度 Depth of effective hardened layer mm	重量 Weight kg/m	外徑 Diameter D mm	
3	SCF 3	-4	400	1.5以上 1.5 and above	0.06	3	
4	SCF 4		400		0.10	4	
5	SCF 5		-12		2000	0.16	5
6	SCF 6				3000	0.23	6
8	SCF 8	-5	3000		2.0以上 2.0 and above	0.40	8
10	SCF 10	-14	3000			0.62	10
12	SCF 12	-6	4000	2.5以上 2.5 and above		0.89	12
13	SCF 13		4000			1.05	13
16	SCF 16	-17	4000	3.0以上 3.0 and above	1.58	16	
20	SCF 20	-7	6000		2.47	20	
25	SCF 25		6000		3.85	25	
30	SCF 30	-20	6000		5.55	30	
35	SCF 35	-9	6000	3.0以上 3.0 and above	7.55	35	
40	SCF 40		6000		9.87	40	
50	SCF 50		6000		15.41	50	
60	SCF 60		-10		6000	22.20	60
80	SCF 80	-29	6000	3.0以上 3.0 and above	39.46	80	
100	SCF100	-12 -34	6000		61.66	100	