

SCFB 外徑攻牙軸心(不生鏽)

Tapped Shaft (Anticorrosive)




材質：軸承鋼(SUJ2)高週波熱處理，
研磨及表面鍍硬鉻

Material : SUJ2(high carbon chromium steel)
Heat treatment, ground, chromium plated and polished

硬度：HRC 62±2

Hardness : HRC 62±2

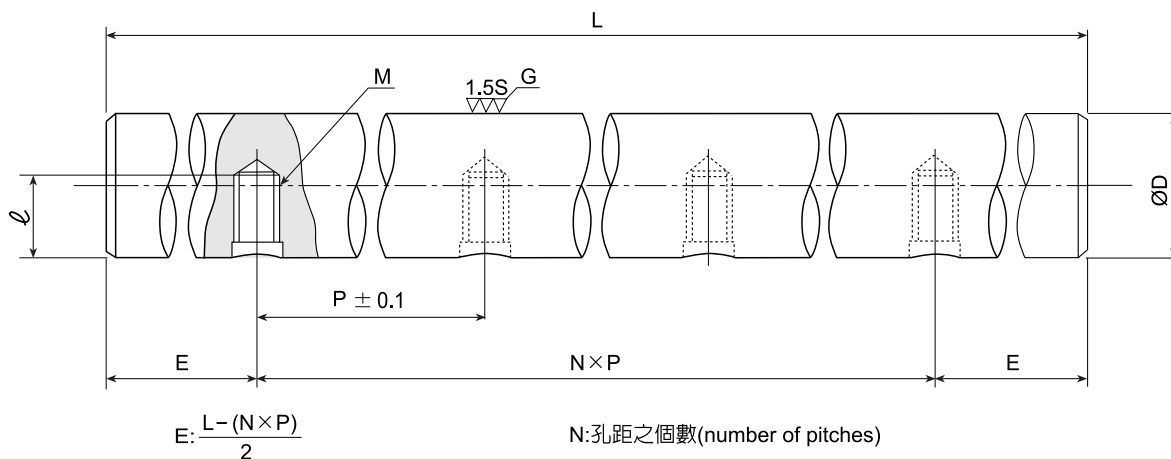

單位(unit) : mm

外徑 Diameter	型號 Type	外徑公差 μm Diameter tolerance	孔距 Pitch	螺栓 Nominal screw	螺牙深度 Thread depth	最大長度 Max length	重量 Weight
D	SCFB	g6	P	M	ℓ	L(max)	kg/m
12	SCFB12	-6~ -17	100	M4x0.7	5.5	4,000	0.89
16	SCFB16	-6~ -17	150	M5x0.8	7	4,000	1.58
20	SCFB20	-7~ -20	150	M6x1	10	4,200	2.47
25	SCFB25	-7~ -20	200	M6x1	12	4,200	3.85
30	SCFB30	-7~ -20	200	M8x1.25	15	4,200	5.55
35	SCFB35	-9~ -25	200	M8x1.25	15	4,200	7.55
40	SCFB40	-9~ -25	300	M8x1.25	18	4,200	9.87

Example of identification number:

SCFB 20X1500

① ②

① Type: Shaft diameter

② Overall Length

訂購例：

SCFB 20X1500

① ②

① 型號：軸心外徑

② 總長度