


SCNT 空心軸心(SUJ2鍍鉻,不生銹)

Anticorrosive Hollow Shaft



材 質：軸承鋼(SUJ2)
處理方式：高週波熱處理，研磨及表面鍍硬鉻

Material : SUJ2(high carbon chromium steel)
Treatment : Heat treatment ground, chromium plated and polished
Hardness : HRC 62±2

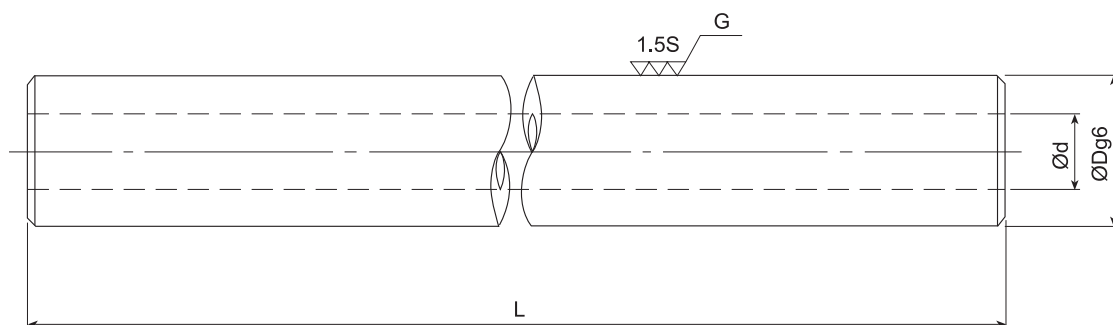

外徑 Outer Diameter D mm	內徑(參考) Inner Diameter(Ref) d mm	型號 Model No. SCNT	外徑公差 Diameter tolerance μm g6	最大製作長度 Max Length L mm	有效硬化層深度 Depth of effective hardened layer mm	重量 Weight kg/m	外徑 Outer Diameter D mm	內徑(參考) Inner Diameter(Ref) d mm
10	4	SCNT 10	-5~-14	500	1.2	0.52	10	4
12	5	SCNT 12	-6~-17	500	1.3	0.79	12	5
13	6	SCNT 13	-6~-17	500	1.3	0.82	13	6
16	8	SCNT 16	-6~-17	1000	1.6	1.28	16	8
20	10	SCNT 20	-7~-20	1200	1.8	1.25	20	10
25	15	SCNT 25	-7~-20	2000	2.0	2.35	25	15
30	16	SCNT 30	-7~-20	2500	2.4	3.50	30	16
35	19	SCNT 35	-9~-25	2500	2.5	4.90	35	19
40	20	SCNT 40	-9~-25	3000	2.6	4.99	40	20
50	26	SCNT 50	-9~-25	3000	2.9	9.91	50	26
60	32	SCNT 60	-10~-29	3000	3.0	14.2	60	32