


# SF 軸心 Shaft

材 質：軸承鋼(SUJ2)  
處理方式：高週波熱處理及研磨  
硬 度：HRC 62±2

Material : SUJ2(high carbon chromium steel)  
Treatment : Heat treatment ground and polished  
Hardness : HRC 62±2

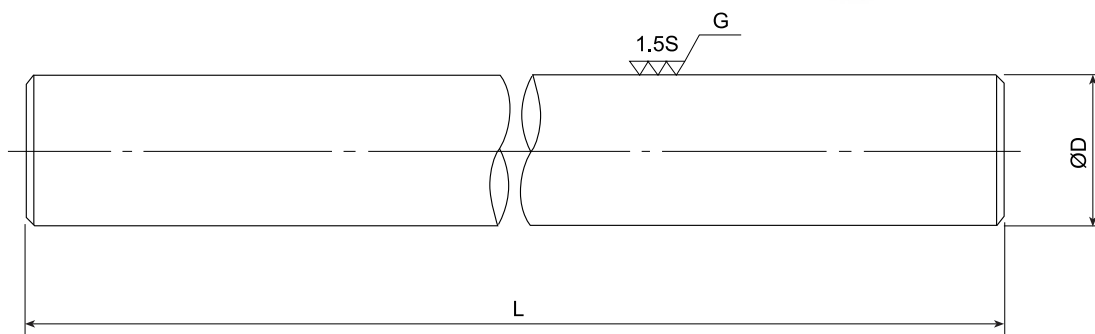

外徑 Diameter D	型號 Model No.	外徑公差 Diameter tolerance µm	最大製作長度 Max Length	有效硬化層深度 Depth of effective hardened layer	重量 Weight	外徑 Diameter D	
mm	SF	g6	L mm	mm	kg/m	mm	
3	SF 3	-4	400	1.5以上 1.5 and above	0.06	3	
4	SF 4		400		0.10	4	
5	SF 5		2000		0.16	5	
6	SF 6		3000		0.23	6	
8	SF 8	-5	3000		0.40	8	
10	SF 10	-14	4000		0.62	10	
12	SF 12	-6	6000		0.89	12	
13	SF 13	-17	6000		1.05	13	
16	SF 16	-7	6000		2.0以上 2.0 and above	1.58	16
20	SF 20		6000		2.47	20	
25	SF 25		6000	3.85	25		
30	SF 30		6000	5.55	30		
35	SF 35	-9	6000	2.5以上 2.5 and above	7.55	35	
40	SF 40		6000	9.87	40		
50	SF 50		6000	15.41	50		
60	SF 60		6000	22.20	60		
80	SF 80	-10	6000	3.0以上 3.0 and above	39.46	80	
100	SF100	-12 -34	6000		61.66	100	