


# SUSC 不銹鋼軸心

## Stainless Shaft

材 質：不銹鋼(SUS 304)  
處理方式：表面鍍硬鉻

Material : SUS 304  
Treatment : Chromium plated, grounded and polished

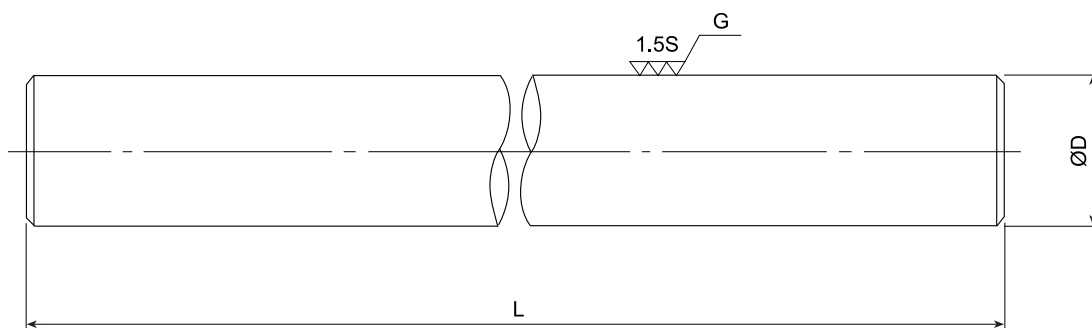

外徑 Diameter D	型號 Model No.	外徑公差 Diameter tolerance $\mu\text{m}$	最大製作長度 Max. Length	重量 Weight	外徑 Diameter D
mm	SUSC	f7	L (mm)	kg/m	mm
6	SUSC 6	-13	2500	0.22	6
8	SUSC 8		3000	0.39	8
10	SUSC 10	-28	3000	0.62	10
12	SUSC 12		3000	0.90	12
15	SUSC 15	-16	3000	1.40	15
16	SUSC 16		3000	1.59	16
20	SUSC 20	-34	3000	2.49	20
25	SUSC 25		3000	3.89	25
30	SUSC 30	-41	3000	5.60	30
35	SUSC 35		3000	7.63	35
40	SUSC 40	-25	3000	9.96	40
45	SUSC 45		3000	12.60	45
50	SUSC 50	-50	3000	15.56	50

※其他不銹鋼材質或外徑公差亦可供貨，請先與本公司聯絡