


直線運動滑軌 ● 滾柱型 GRDP / GRDP - S

GRDP / GRDP - S

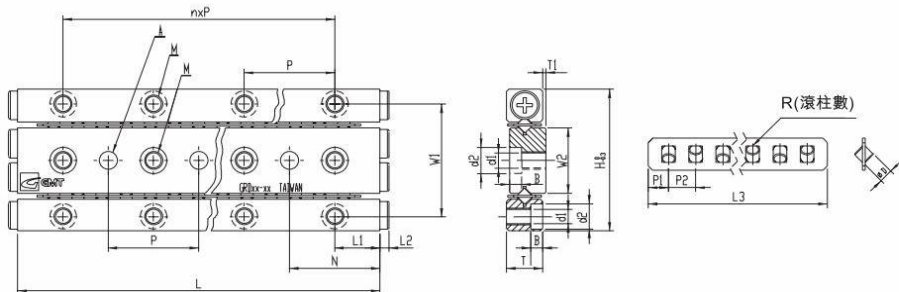

規格說明

型號表示 標準規格	最大行程 (mm)	外型尺寸(mm)								保持器規格(mm)					
		H	T	L	n*p	W1	W2	L1	L2	N	ØD	L3	R	P1	P2
GRDP01-20	13	17	4	20	1*10	13.4	7.8	5	1.3	10	Ø1.5	15.8	5	1.9	3
GRDP01-30	21			30	2*10							21.8	7		
GRDP01-40	29			40	3*10							27.8	9		
GRDP01-50	37			50	4*10							33.8	11		
GRDP01-60	45			60	5*10							39.8	13		
GRDP01-70	53			70	6*10							45.8	15		
GRDP01-80	61	80	7*10	51.8	17										
GRDP02-30	24	24	6	30	1*15	19	11	7.5	1.5	15	Ø2	21.6	5	2.8	4
GRDP02-45	30			45	2*15							33.6	8		
GRDP02-60	44			60	3*15							41.6	10		
GRDP02-75	58			75	4*15							49.6	12		
GRDP02-90	72			90	5*15							57.6	14		
GRDP02-105	86			105	6*15							65.6	16		
GRDP02-120	100			120	7*15							73.6	18		
GRDP02-135	106			135	8*15							85.6	21		
GRDP02-150	120			150	9*15							93.6	23		
GRDP02-165	134			165	10*15							101.6	25		
GRDP02-180	148	180	11*15	109.6	27										
GRDP03-50	34	36	8	50	1*25	29	16.6	12.5	2	2.5	Ø3	36.4	7	3.2	5
GRDP03-75	54			75	2*25							51.4	10		
GRDP03-100	74			100	3*25							66.4	13		
GRDP03-125	104			125	4*25							76.4	15		
GRDP03-150	124			150	5*25							91.4	18		
GRDP03-175	144			175	6*25							106.4	21		
GRDP03-200	164			200	7*25							121.4	24		
GRDP03-225	184			225	8*25							136.4	27		
GRDP03-250	204			250	9*25							151.4	30		
GRDP03-275	224			275	10*25							166.4	33		
GRDP03-300	244	300	11*25	181.4	36										
GRDP04-80	54	44	11	80	1*40	35	20	20	2	40	Ø4	57.6	8	4.3	7
GRDP04-120	92			120	2*40							78.6	11		
GRDP04-160	130			160	3*40							99.6	14		
GRDP04-200	154			200	4*40							127.6	18		
GRDP04-240	192			240	5*40							148.6	21		
GRDP04-280	230			280	6*40							169.6	24		
GRDP04-320	254			320	7*40							197.6	28		
GRDP04-360	292			360	8*40							218.6	31		
GRDP04-400	330			400	9*40							239.6	34		
GRDP04-440	354			440	10*40							267.6	38		
GRDP04-480	392	480	11*40	288.6	41										

訂購方法： GR 滾柱 - D 三軌式 - P 塑膠保持器 - 03 滾柱直徑 - 75 滑軌長度 - P 滑軌精度等級

直線運動滑軌 ● 滾柱型 GRDP / GRDP - S

GRDP / GRDP - S



構成零件

材料 型號	零件	軌道	滾柱	保持架
GRDP		SUJ2		工程塑膠

安裝孔尺寸(mm)						單一顆滾柱負荷			質量(g)
T1	M	d1	d2	A	B	基本動態負荷 (C)	基本靜態負荷 (Co)	荷重能力 (Fu)	標準規格
0.5	M2	1.65	3	2 ^{+0.010}	1.4	125N/1pcs	144N/1pcs	48N/1pcs	9
									13
									17
									20
									24
									29
33									
0.5	M3	2.55	4.4	3 ^{+0.010}	2	293N/1pcs	292N/1pcs	97N/1pcs	27
									40
									53
									66
									78
									91
									104
									117
									130
									142
155									
0.5	M4	3.3	6	4 ^{+0.012}	3.1	638N/1pcs	761N/1pcs	254N/1pcs	94
									139
									183
									228
									273
									317
									362
									406
									451
									496
540									
0.5	M5	4.3	7.5	5 ^{+0.012}	4.1	1230N/1pcs	1170N/1pcs	390N/1pcs	248
									366
									484
									602
									722
									840
									959
									1079
									1197
									1316
1434									